GCrazy Iron KAWASAKI NINJA H2 SX SE 2020-ID 4135418/4135417




Installing:

Left side:

Right side:



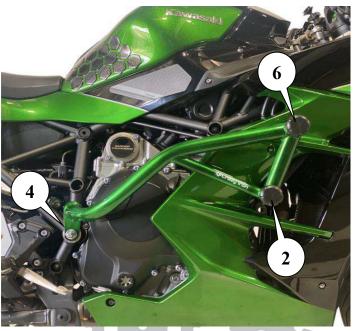

Comments:

- 1. Contact a specialized service, do not install the cage yourself!
- 2. Remove original bolt in point 3 and use rod instead original bolt
- 3. Unscrew the original bolt at point№1
- 4. Attach left side of cage to points 1 and 3, screw lightly left side of cage to point 1 with bolt and to point 3 through sleeve with nut
- 5. Unscrew the original bolt at point№2
- 6. Attach right side of cage to points 2 and 4, screw lightly left side of cage to point 2 with bolt and to point 4 with nut
- 7. Tighten fixture according to the table
- 8. Install the Sliders at points №№ 1,2,5,6 and fix them with self-tapping screws.
- 9. In the case ID 4135418 instead of sliders to point №1,2,5,6 use Damper sliders (see assembly diagram of damper sliders)

Tightening torques Nm						
	Connection type					
Thread	Steel	Aluminum				
M6	10	6				
M8	24	20				
M10	48	35				
M12	56	45				

GCrazy Iron

Ν	Item				
	Bolt M10x80	Spring washer	Washer	Slider	Self-tapping screw
1		0	0		Ommon
	Bolt M10x80	Spring washer	Washer	Slider	Self-tapping screw
2		0	0		Common
3	Rod M10x425	Sleeve d41\d35	Nut	Washer	Decorative cap
				0	
4		Sleeve d39\d34 t	Nut	Washer	Decorative cap
				0	
5	Slider	Self-tapping screw			
		Common			
6	Slider	Self-tapping screw			