



CRAZY IRON

МЫ ПРОИЗВОДИМ БЕЗОПАСНОСТЬ





KAWASAKI Z400
ID: 41371012/41371017

Left side

Installing:



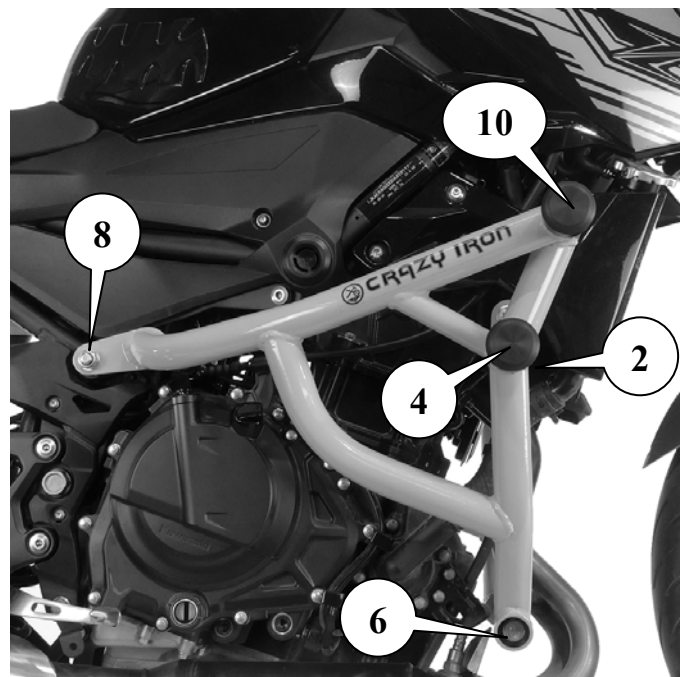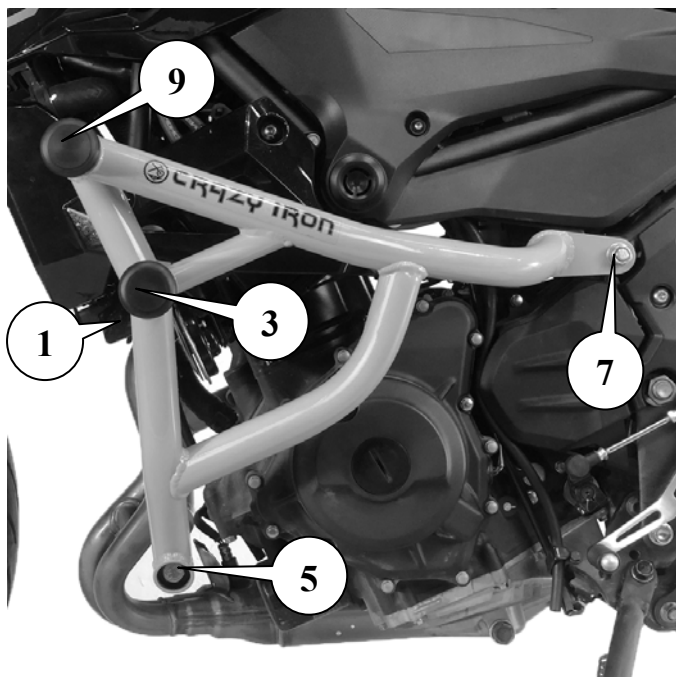



































Right side



Comments:

1. Contact a specialized service, do not install the cage yourself!
2. Unscrew the original bolt at point № 1 and screw with the M10x1.25x130 Bolt through the 22x10x81 spacer Plate with a welded nut. The nut should look towards the engine!!!
3. Remove the original bolt from point №7
4. Attach the left part of the cage to point №3 and to point №7. Orient the Plate so that the mounting holes align
5. Bring the left part of the cage with the bolt M10x40 at point №3 and the brace M10x330 through the spacer 20x10x30 at point №7
6. Remove the original bolt at point № 2 and screw with the M10x1.25x100 Bolt through the 22x10x48 Spacer Plate with a welded nut. The nut should look towards the engine !!!
7. Attach the right part of the cage to point №4 and point №8. Orient the Plate so that the mounting holes align.
8. Bring the right part of the cage with a M10x40 bolt at point №4 and a nut onto the M10x320 Brace through a 20x10x30 spacer at point №8.
9. Install the brace 255 mm long between points №5 and №6 and fix it with M10x1.25x30 bolts
10. Tighten fixture according to the table.
11. Install the Sliders at points №№ 3,4,9,10 and fix them with self-tapping screws.
12. Put decorative caps on nuts at point №7 and №8.
In the case of using a damper cage, article 41371017 instead of sliders to point №3,4,9,10 Damper sliders are used. (see assembly diagram of damper sliders)

Tightening torques Nm		
Thread	Connection type	
	Steel	Aluminum
M6	10	6
M8	24	20
M10	48	35
M12	56	45

N	Items				
1	Bolt M10x1,25x130	Spring washer	Washer	Plate 017	Spacer 22x10x81
					
2	Bolt M10x1,25x100	Spring washer	Washer	Plate 017	Spacer 22x10x48
					
3	Bolt M10x40	Spring washer	Washer	Slider	Screw
					
4	Bolt M10x40	Spring washer	Washer	Slider	Screw
					
5	Bolt M10x1,25x30	Spring washer	Washer	Brace L=255	
					
6	Bolt M10x1,25x30	Spring washer	Washer	Brace L=255	
					
7	Brace M10x320	Nut	Washer	Spacer 20x10x30	Decorative caps
					
8	Brace M10x320	Nut	Washer	Spacer 20x10x30	Decorative caps
					
9	Slider	Screw			
					
10	Slider	Screw			
	